

NOTICE:

2" Sch. 40 gray PVC conduit is required for all primary installations.

It is the member's responsibility to pick up any vault or pull box from our warehouse and install it on their property.

(Warehouse locations listed on back panel)

You must have a JOB NUMBER for our warehouse in order to pick up any vault or pull box.




Please reference your invoice or contact the service planner in your county to obtain the JOB NUMBER.

Failure to follow these requirements will result in significant delays in your service installation.



Know what's below.
Call before you dig.

WARNING

 <p>Hazardous voltage inside. Can shock, burn, or cause death.</p> <p>Keep out. If open or unlocked, immediately call Owen Electric Cooperative 1-800-372-7612</p>	<p>ENERGIZED ELECTRICAL EQUIPMENT</p>  <p>Maintain 5 ft. clearance on this side and 5 ft. on all other sides from fences, shrubs, and structures.</p>	<p>STOP!</p>  <p>48 HOURS BEFORE YOU DIG CALL K.U.P.I. 1-800-752-6007</p>
--	---	---

Please verify your checklist requirements if applicable to your service:

- Property Owner - Permission
- Installed Conduit with Pull String
- Right of Way Cleared of Trees and Debris
- All Fees and Charges Paid
- Primary Ditch Inspection
- Electrical Inspection Cleared



A Touchstone Energy Cooperative

Owenton Warehouse
8205 Hwy 127 N
PO Box 400
Owenton, KY 40359
www.owenelectric.com

Walton Warehouse
13179 Walton-Verona Road
Walton, KY 41094


Owen Electric Cooperative is an equal opportunity provider.

Owen Electric Cooperative's

Primary Underground Electric Service



This brochure provides the information you need to prepare for your underground electric service installation.

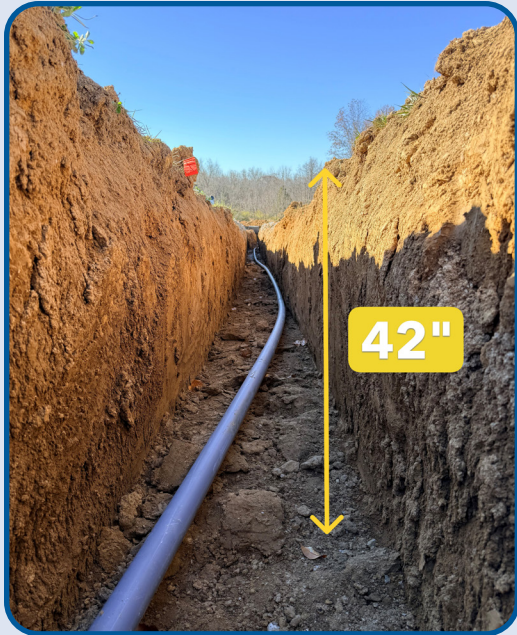

Ditch shall be 42 inches deep minimum and free from rocks/sharp objects.



Any radius elbows used shall be 3 feet, 90 degree 2 inch gray PVC sweeps. These sweeps shall be installed flush to OEC pole or stake placed by an OEC Service Planner.

Do **NOT** backfill the primary trench until a primary ditch inspection has been completed by an OEC representative.

Primary Ditch Inspection Required:

CALL PRIOR TO BACKFILLING FOR INSPECTION:

**OPERATIONS CLERKS
800-372-7612, OPTION 5**



- Setting depth for the transformer vaults should allow for final grade so the vault is still out of the ground 6 inches.
- Install all conduits in the center of the opening in the vault.
- Make sure the vault is level in both directions.
- Transformer vaults must be installed within 25 ft. of nearest driveway or pavement. With the front facing the driveway.
- All vaults must be picked up from Owen Electric Headquarters at either warehouse location. A provided job number is required. Warehouse locations listed on back page.



If required, face junction cabinets toward the road or the driveway.



If required, all pull boxes shall be installed flush with final grade.

